


Quad Monitors LQM-241W



제품 규격

- Main Body : 552.5 x 389 x 95 (mm) / 21.75 x 15.31 x 3.74 (inch)
- With stand : 584 x 416.8 x 150 (mm) / 23 x 16.4 x 5.9 (inch)
- Weight : 11kg / 24.25lbs

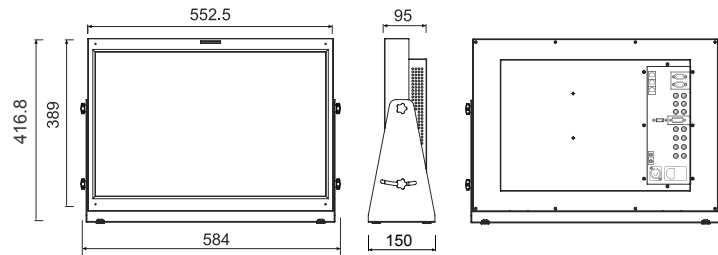

LCD

Size	24"
Resolution	1920 x 1200 (16 : 10)
Pixel Pitch	0.270mm
Color Depth	16.7M
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	300cd/m ² (center)
Contrast Ratio	1000:1
Display Area	518(H) x 324(V) mm

24" 1920x1080 Full HD 해상도의 쿼드 LCD 모니터

LQM-241W은 고품질의 24인치 4분할 화면 모니터로 프리미엄 모델인 LVM-243W-3G의 고급 기능 대부분을 지원합니다. LQM-241W는 한번에 4개의 HD/SD-SDI 입력을 디스플레이 할 수 있으며 추가로 입력되는 소스를 풀 스크린으로 보여주거나 4분할된 화면의 한 부분으로 디스플레이 할 수 있습니다. 또한 Waveform, Vectorscope를 포함한 다양한 방송용 기능을 제공합니다.



Product Highlights

- 24" 1920x1080 Native HD resolution
- Matte Finish Panel
- Various Display Modes
 - 4 pictures
 - 2 pictures + 2 Waveform/Vectorscope
 - 1 picture + 1 Waveform/Vectorscope
 - 1 main picture + 3 sub pictures...
- 1:1 Pixel Mapping Modes for SD/HD
- Audio Level Meter Display
- Blue Only
- H/V Delay
- Key lock
- Marker
- Mono
- Time Code Display
- UMD
- Various Scan modes
- Waveform/Vectorscope
- CC-608 ANC
- CC-608 LINE 21
- CC-708
- TVLogic Color Calibration Utility

Input

1 x DVI-I	Analog & Digital RGB
3 x BNC	CVBS / Component Input
4 x BNC	SDI A/B/C/D Channel Input
1 x HDMI	HDMI Input

Output

3 x BNC	Analog (Passive Loop Through)
4 x BNC	SDI A/B/C/D Channel Output (Active Loop Through)

Input Signal

Analog	CVBS / S-Video / Component Video / RGB(D-TV)
HD-SDI	1.485Gbps
SD-SDI	270Mbps
DVI-D (PC Mode)	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1600x1200/1920x1200/1920x1080
DVI-Analog	640x480/720x400/800x600/1024x768/1280x768/1280x1024
HDMI	1080p (24/25/30/50/60)/1080i(50/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50) & VESA / IBM Modes

Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC, PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)
RGB	1.0Vp-p (G With Sync), 0.7Vp-p (B,R)

SDI Input Signal Formats

SMPT-274M	1080i (60 / 59.94 / 50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPT-296M	720p (60/59.94/50)
SMPT-260M	1035i (60/59.94)
SMPT-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Stereo)
Power	DC 24V / AC 100~240V (50~60Hz)
Power Consumption (Approx.)	77Watts (Typ.)
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / Stand

* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

옵션 액세서리

