


SD/HD/3G-SDI Multi-Format Monitors

LVM-170A *New!*



제품 규격


- Main Body : 421.5 x 264 x 74.1 (mm) / 16.59 x 10.39 x 2.91 (inch)
- With stand : 483.5 x 310.3 x 137.5 (mm) / 19.03 x 12.2 x 5.41 (inch)
- Weight : TBD

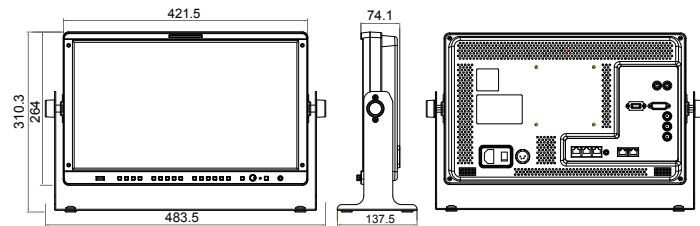

LCD	
Size	17.3"
Resolution	1920 x 1080 (16 : 9)
Pixel Pitch	0.199mm
Color Depth	16.7M
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	300cd/m ² (center)
Contrast Ratio	700:1
Display Area	381(H) x 214(V) mm

다양한 용도의 17" FHD 모니터

신제품 17인치 모니터 LVM-170A는 16:9 화면비율을 갖추고 Full HD 해상도의 PLS 패널을 장착하여 178° 의 넓은 시야각과 HD 표준의 색역(Rec. 709)을 지원합니다. LVM-170A는 티브이로직 고유의 12비트 비디오 프로세싱 엔진과 색보정 기술이 결합되어 정확한 색을 재현하며 3G-SDI 및 HDMI 등 다양한 입력신호를 지원하는 동시에 Waveform/Vectorscope, Markers, Audio Level Meter Display, Focus Assist, Timecode, UMD, Range Error 등 전문가를 위한 다양한 기능을 제공합니다.

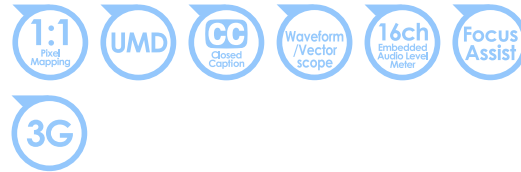

Product Highlights

- 17.3" 1920x1080 (16:9) Resolution
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- Key lock
- Luma(Y) Zone Check
- Marker
- Mono
- Range Error
- Time Code Display
- UMD
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- CC-608 ANC
- CC-608 LINE 21
- CC-708
- TVLogic Color Calibration Utility

Input

1 x BNC	CVBS / S-Video / Component / RGB(D-TV)
2 x BNC	SDI A/B Channel Input
1 x HDMI	HDMI Input
1 x DVI -I	DVI Input

Output

1 x BNC	CVBS / S-Video / Component / RGB(D-TV)
1 x BNC	3G/HD/SD-SDI OUT

Input Signal

Analog	CVBS / S-Video / Component / RGB(D-TV)
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
DVI-Analog	640x480/720x400/800x600/1024x768/1280x1024/1366x768
DVI-D (PC & HDMI)	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768/1080p(23.98/24/25/30/50/60)/1080i(50/59.94/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)
HDMI (PC & HDMI)	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768/1080p(23.98/24/25/30/50/60)/1080i(50/59.94/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)

Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC. PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)
RGB	1.0Vp-p (G With Sync), 0.7Vp-p (B,R)

SDI Input Signal Formats

SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) 1080i(60/59.94/50)
SMPTE-274M	1080i(60/59.94/50)/1080p(30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) Internal Speaker (Stereo)
Power	DC 12/24V / AC 100~240V (50~60Hz)
Power Consumption (Approx.)	60Watts
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / Stand / USB Cover

* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

옵션 액세서리

