


SD/HD/3G-SDI Multi-Format Monitors

LVM-176W



제품 규격


- Main Body : 427 x 310 x 90.5 (mm) / 16.81 x 12.2 x 3.56 (inch)
- With stand : 474.2 x 327.8 x 150 (mm) / 18.66 x 12.9 x 5.9 (inch)
- Weight : 7kg / 15.4lbs

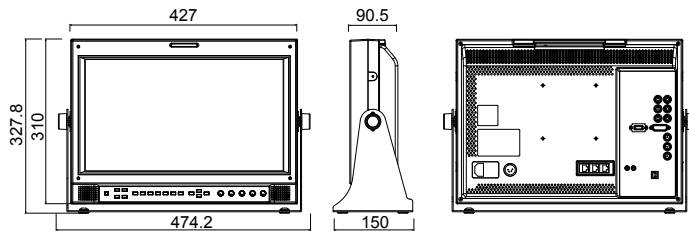

LCD	
Size	17"
Resolution	1366 x 768 (16 : 9)
Pixel Pitch	0.273mm
Color Depth	16.7M
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	350cd/m ² (center)
Contrast Ratio	900:1
Display Area	373(H) x 210(V) mm

방송국과 프로덕션에서 사용할 수 있는 17" 모니터

LVM-176W는 LVM-173W-3G와 같은 LCD 패널을 사용하는 경쟁력 있는 모델입니다. 이 제품은 8비트의 16:9의 화면비율을 가진 LCD 모니터를 사용하고 있으며, 비할데 없는 스케일링 퍼포먼스를 가지고 있습니다. 또한 LVM-176W는 Audio Level Meter, CC decoding, and 1:1 pixel mapping을 포함하고 있습니다. LVM-176W는 전문성과 가격면에서 더할 나위 없이 좋은 선택이 될 것입니다.

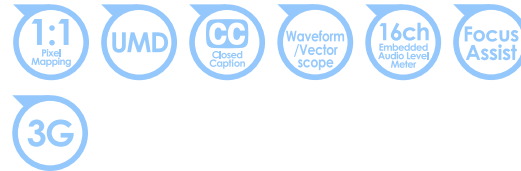

Product Highlights

- 17" 1366x768 (16:9) Resolution
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- Key lock
- Luma('Y') Zone Check
- Marker
- Mono
- Range Error
- Time Code Display
- UMD
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- CC-608 ANC
- CC-608 LINE 21
- CC-708
- TVLogic Color Calibration Utility

Input	
3 x BNC	CVBS / S-Video / Component / RGB(D-TV)
2 x BNC	3G/HD/SD-SDI A/B Channel Input
1 x HDMI	HDMI Input
1 x DVI-I	DVI Input

Output	
3 x BNC	CVBS / S-Video / Component / RGB(D-TV)
1 x BNC	3G/HD/SD-SDI OUT

Input Signal	
Analog	CVBS / S-Video / Component / RGB(D-TV)
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
DVI-Analog	640x480/720x400/800x600/1024x768/1280x1024/1366x768
DVI-D (PC & HDMI)	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768/1080p(23.98/24/25/30/50/60)/1080i(50/59.94/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)
HDMI (PC & HDMI)	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768/1080p(23.98/24/25/30/50/60)/1080i(50/59.94/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)

Analog Input Spec	
CVBS	1.0Vp-p (With Sync) NTSC, PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(C/Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)
RGB	1.0Vp-p (G With Sync), 0.7Vp-p (B,R)

SDI Input Signal Formats	
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) 1080i(60/59.94/50)
SMPTE-274M	1080i(60/59.94/50)/1080p(30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) Internal Speaker (Stereo)
Power	DC 12/24V / AC 100~240V (50~60Hz)
Power Consumption (Approx.)	60Watts
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / Stand

* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

옵션 액세서리

