


# SD/HD/3G-SDI Multi-Format Monitors

## LVM-246W



### 제품 규격

- Main Body : 552.5 x 389 x 95 (mm) / 21.75 x 15.31 x 3.74 (inch)
- With stand : 586.1 x 416.8 x 150 (mm) / 23 x 16.4 x 5.9 (inch)
- Weight : 10.4kg / 22.92lbs

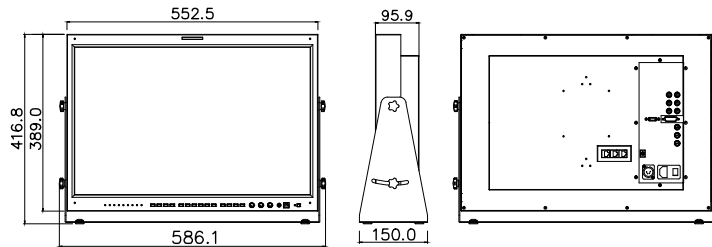

LCD	
Size	24"
Resolution	1920 x 1200 (16 : 10)
Pixel Pitch	0.270mm
Color Depth	16.7M
Viewing Angle (Typ.)	178°(H) / 178°(V)
Luminance (Max.)	300cd/m <sup>2</sup> (center)
Contrast Ratio	1000:1
Display Area	518(H) x 324(V) mm

### 24" FHD 방송용 모니터

LVM-246W는 Full HD 해상도와 IPS 방식의 광시야각 기술이 채용된 최신 LCD 패널을 장착한 합리적인 가격의 24인치 모니터입니다. SD/HD/3G-SDI, HDMI, DVI, Component Video, S-Video, CVBS 등의 다양한 영상신호를 지원하며, Waveform, Vectorscope, Marker, Timecode, Closed Caption 전용 색보정 소프트웨어 등 전문적인 기능을 다양하게 탑재하고 있습니다.



### Product Highlights

- 24" 1920 x 1200 Native HD Resolution
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- Key lock
- Luma(Y') Zone Check
- Marker
- Mono
- Range Error
- Time Code Display
- UMD
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom
- CC-608 ANC
- CC-608 LINE 21
- CC-708
- TVLogic Color Calibration Utility

### Input

1 x DVI-I	Analog & Digital RGB
3 x BNC	CVBS / Component Input
2 x BNC	SDI A/B Channel Input
1 x HDMI	HDMI Input

### Output

3 x BNC	Analog (Passive Loop Through)
1 x BNC	SDI A/B Selected Channel Output (Active Loop Through)

### Input Signal

Analog	CVBS / S-Video / Component / RGB(D-TV)
3G-SDI	2.970Gbps
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI	480i/480p/576i/576p/720p/1080i/1080p/640x480/720x400/800x600/1024x768/1280x1024/1600x1200/1920x1200
DVI-Analog	640x480/720x400/800x600/1024x768/1280x768/1280x1024/1366x768
DVI-D (PC mode)	640x480/720x400/800x600/1024x768/1280x768/1280x1024
DVI-D (HDMI mode)	1080p (24/25/30/50/60)/1080i(50/60)/720p(50/60)/480i(60)/480p(60)/576i(50)/576p(50)

### Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC, PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)
RGB	1.0Vp-p (G With Sync), 0.7Vp-p (B,R)

### SDI Input Signal Formats

SMPT-274M	1080i (60 / 59.94 / 50)
	1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPT-296M	720p (60/59.94/50)
SMPT-260M	1035i (60/59.94)
SMPT-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)
Audio IN	Embedded Audio / Analog stereo (Phone Jack)
Audio OUT	Analog stereo (Phone Jack) / Internal Speaker (Stereo)
Power	DC 24V / AC 100~240V (50~60Hz)
Power Consumption (Approx.)	77Watts
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / Stand

\* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

### 옵션 액세서리

