

Viewfinder LCD Monitors


VFM-056WP



제품 규격

- Main Body : 156 x 103 x 26.5 (mm) / 6.14 x 4.06 x 1.04 (inch)

- Weight : 0.3kg / 0.66lbs

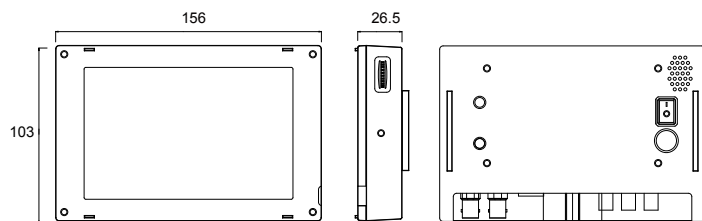

LCD

Size	5.6"
Resolution	1280 x 800 (16 : 10)
Pixel Pitch	0.0945mm
Color Depth	16.7M
Viewing Angle (Typ.)	170°(H) / 170°(V)
Luminance (Max.)	300cd/m ² (center)
Contrast Ratio	500:1
Display Area	121(H) x 76(V) mm

가볍고 컴팩트한 디자인의 5.6" 뷰파인더 모니터 VFM-056WP는 1280x800의 고해상도에 0.3kg 이하의 가벼운 무게를 자랑하는 HDSLR용 5.6" 뷰파인더 모니터입니다. VFM-056WP의 혁신적이고 사용자 편의를 고려한 인체공학적인 디자인과 견고하고 가벼운 마그네슘 재질의 케이스는 실내 및 실외 촬영 시 편안하고 편리한 사용조건을 제공합니다. 광범위한 입력신호(3G/HD/SD-SDI, HDMI, Composite, Component, S-Video)를 지원하며 PAL, NTSC, SECAM과 같은 다양한 비디오 신호 포맷을 지원합니다. 이외에도 DSLR Scale, Focus Assist, Scan, Marker, Audio Level Meter, 스피커, Time code Display, HDMI-to-SDI 변환 출력(720p), Waveform, Vectorscope, Luma(Y) Zone Check, Range Error와 같은 고급 기능을 제공합니다.



Product Highlights

- 5.6" 1280x800 (16:10) Resolution
- Magnesium Housing + Light Weight
- 3G-SDI Level A/B
- Audio Level Meter Display
- Blue Only
- Focus Assist
- H/V Delay
- Luma(Y) Zone Check
- Marker
- Max Brightness On / Off
- Mono
- Range Error
- Temperature Adaptive Color
- Time Code Display
- User Aspect
- Various Scan modes
- Waveform/Vectorscope
- Zoom

Input

3 x RCA	Analog Video Input
1 x BNC	SDI Channel Input
1 x HDMI	HDMI(1.2Ver) Input

Output

1x BNC	HDMI-to-SDI conversion output
--------	-------------------------------

Input Signal

Analog	CVBS / S-Video / Component Video
3G-SDI	2.970Gb/s
HD-SDI	1.485Gbps
SD-SDI	270Mbps
HDMI	1080p (24/25/30/50/60)/1080i(50/60)/720p (50/60)/480i(60)/480p(60)/576i(50)/576p(50) & VESA/IBM Modes

Analog Input Spec

CVBS	1.0Vp-p (With Sync) NTSC. PAL
S-Video	1.0Vp-p (Y With Sync), 0.286/0.300 Vp-p(Chroma)
Component Video	1.0Vp-p (Y With Sync), ±350mV (Pb,Pr)

SDI Input Signal Formats

SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF) / 1080i (60/59.94/50)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)

Audio In	Embedded Audio
Audio Out	Analog Stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12V/3A (Max 6.0A)
Power Consumption (Approx.)	8.4Watts(Typ.)
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Accessory	AC Power Cord / DC Power Adaptor / BNC Connector / Camera Mount Support

* 제품 사양은 사전 공지 없이 변경될 수 있습니다.

옵션 액세서리

